


Roofing Selection Guide

Luxury & Designer
Roofing Shingles

 **certainteed**
SAINT-GOBAIN

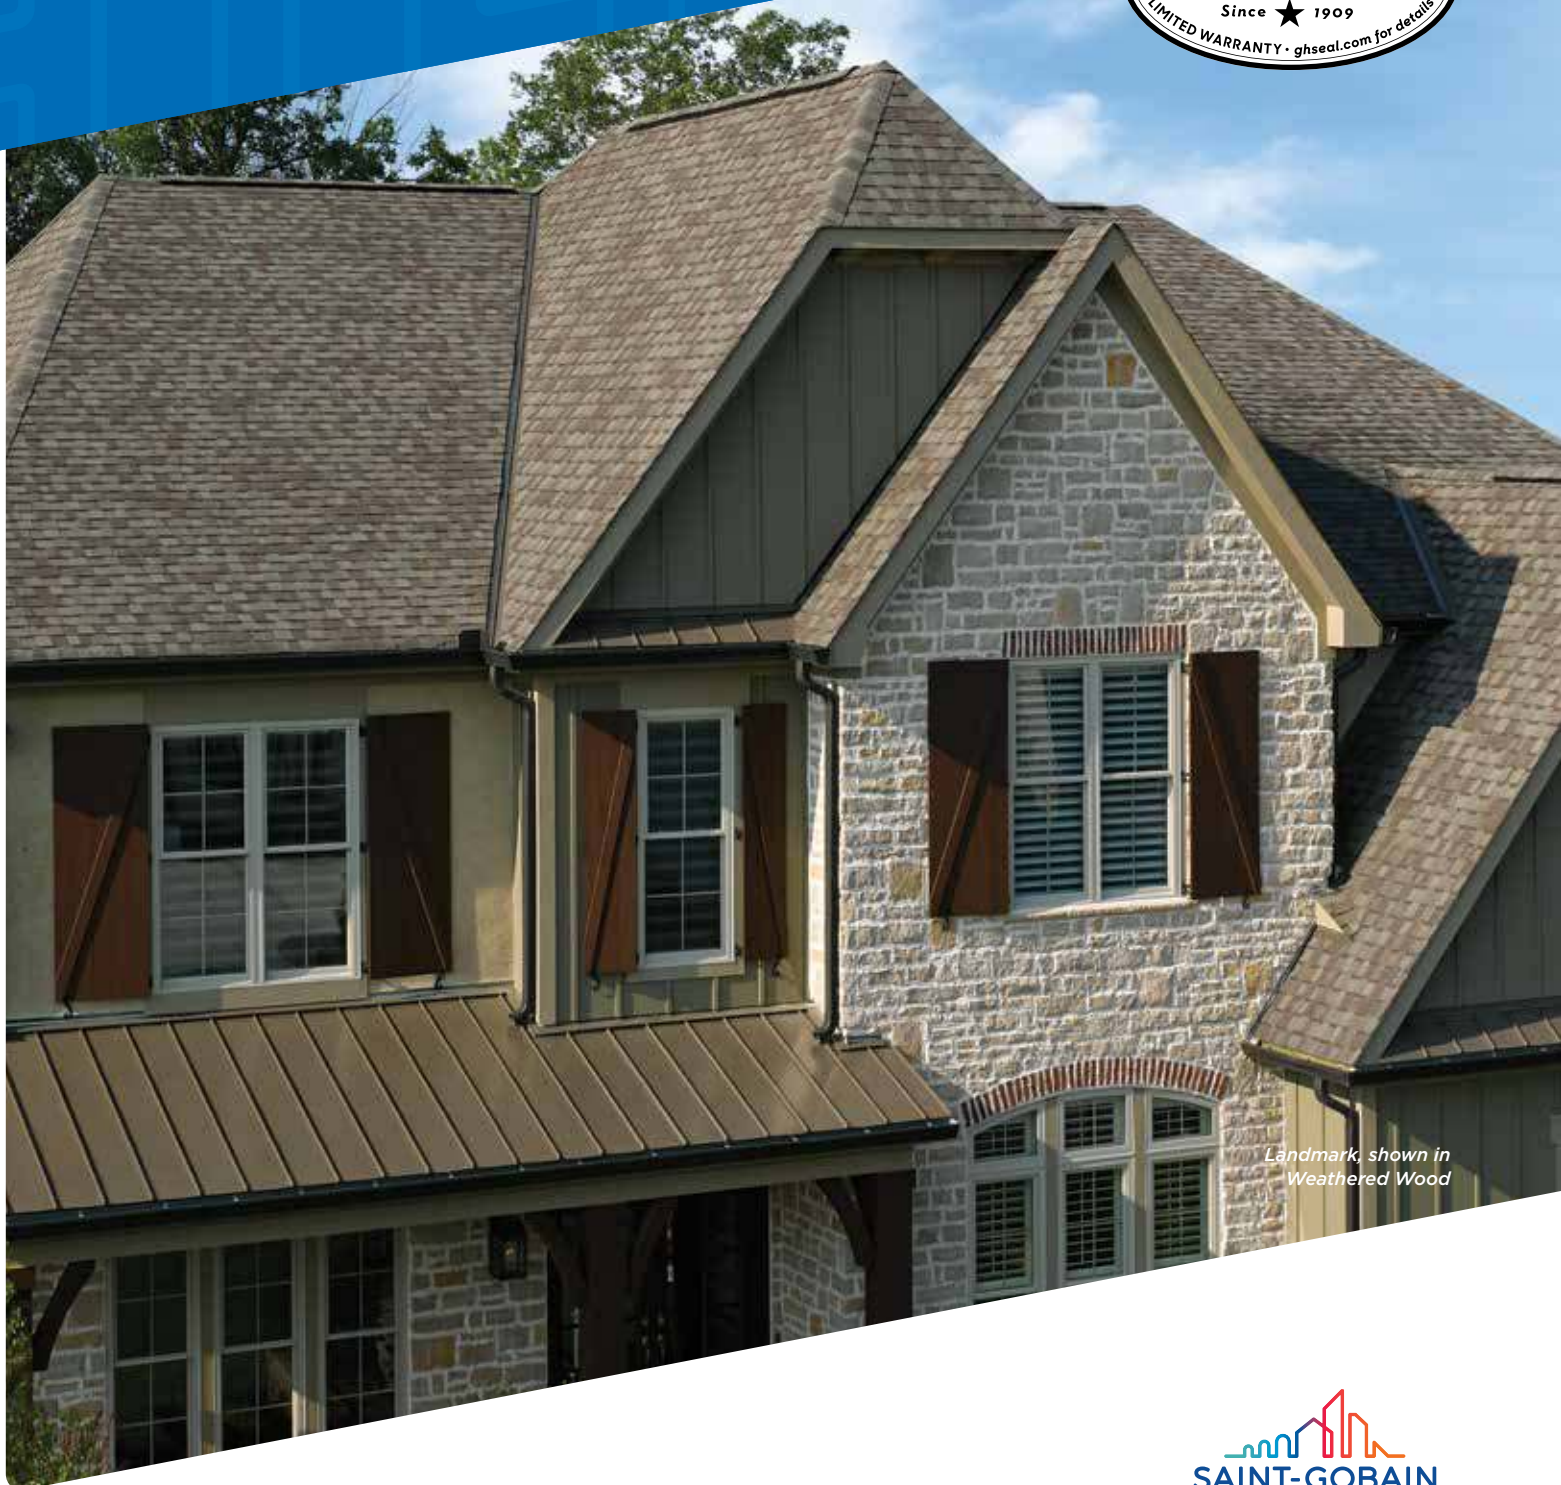

*Landmark, shown in
Weathered Wood*


SAINT-GOBAIN



NOTE: Due to limitations of printing reproduction, CertainTeed can not guarantee the identical match of the actual product color to the graphic representations throughout this publication.



You
know it
when you
see it.

It's not just a roof.
It's a CertainTeed roof.

Quality. Durability. Style. Color.

When you select a roof for your
home, there's a lot to consider.

That's when a roof becomes more
than just a roof. The same way a
home is more than just a house.

You want the best for your home
and everything in it.

So why guess,
when you can be **Certain?**

 **certainteed**
SAINT-GOBAIN

Insist upon the

Integrity Roof System[®]



and get the ultimate in roof performance!



PERFORMANCE ENGINEERED FOR COMPLETE PROTECTION, STRONG RESILIENCE AND LASTING BEAUTY

Your roof should do more than shield the elements. It should protect your home, and more importantly, everything you care about.

The Integrity Roof System is designed to provide optimum performance, day after day, year after year. It's a full suite of roofing components engineered to complement each other and create an active defense against whatever gets in your home's way.

After all, the Integrity Roof System is backed by the power of CertainTeed – and better-quality components means you've got a roof system built to protect against even the most extreme conditions.

1. Waterproofing Underlayment

Waterproofing shingle underlayment prevents leaks from wind-driven rain and ice dams

2. Water-Resistant Underlayment

High-performance underlayment provides a water-resistant layer over the roof deck and a secondary barrier against leaks

3. Shingle Starter

Perfect starts every time and designed to work in tandem with the roof shingles above

4. Roof Shingles

Choose the best, covered by the strongest warranty in the business

5. Roof Ventilation

Engineered for ideal roof ventilation especially when matched with CertainTeed Intake Vents

6. Hip & Ridge

Perfect finish for hip and ridge lines, complementing all CertainTeed shingles





Technology that protects the beauty of your roof and strengthens its performance.

QuadraBond®

Advanced Layering

CertainTeed's specially formulated adhesive adheres shingle layers at four points, more than any other manufacturer. This superior bond provides greater protection against shingle delamination to maximize performance over the life of the shingle in any climate.

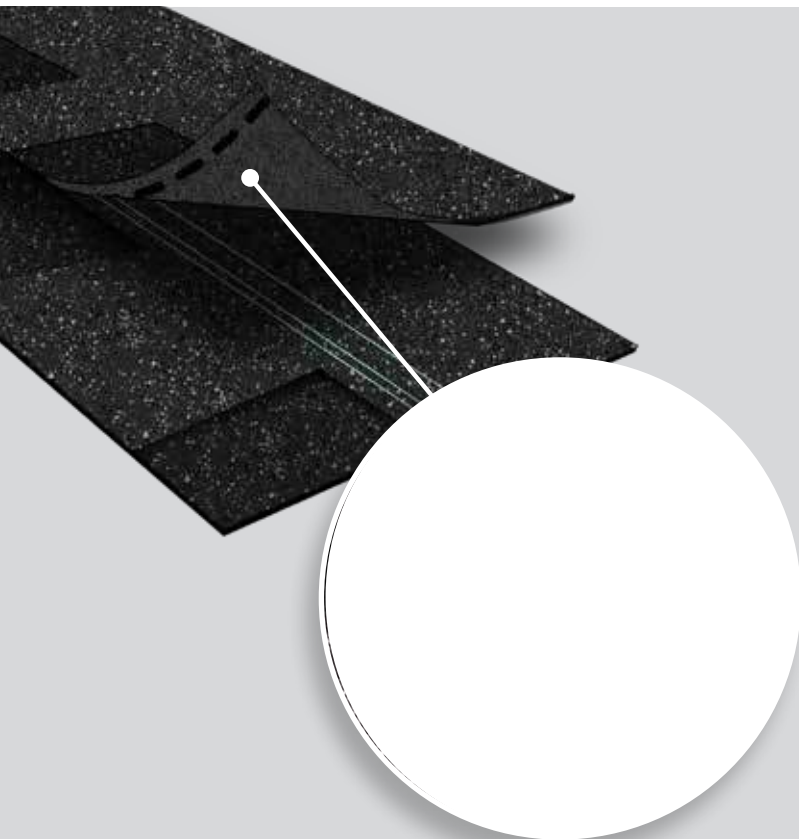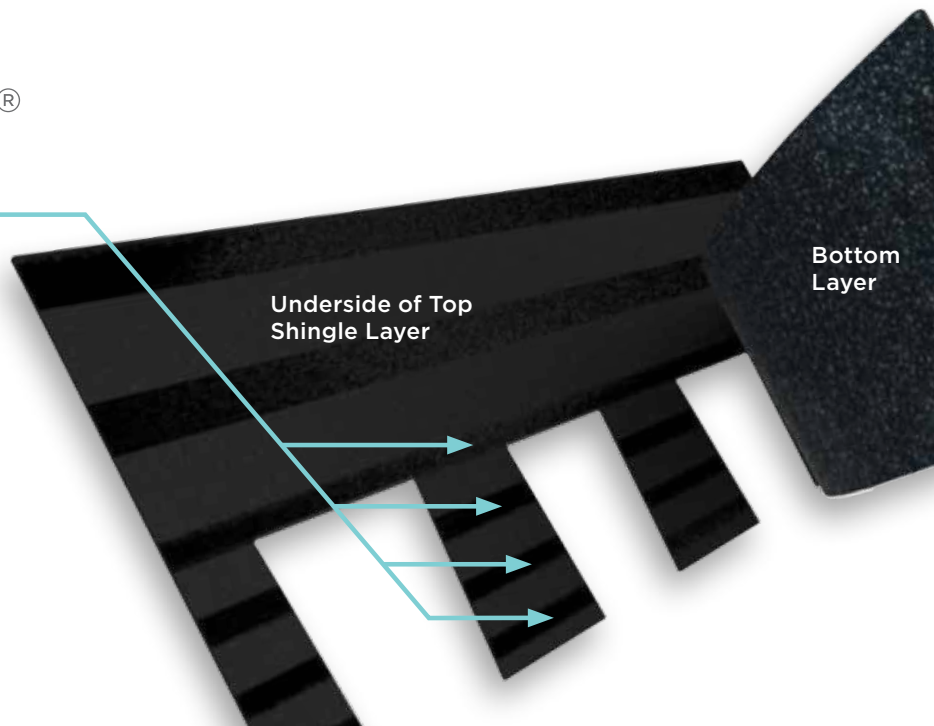

CertaSeal®

Uplift Protection

CertaSeal® is a fast-activating modified asphalt sealant with a 20-year record of proven performance. Designed to seal shingles together upon installation, it protects roofs from wind uplift and shingle blow-off so that homes stay safe and dry. It's also engineered to remain flexible after installation, unlike harder sealants that can dry out and crack over time.


NailTrak[®]

Fast, Accurate, Visible

The new and improved **NailTrak** nailing line, a feature on CertainTeed designer shingles.

Now **NailTrak** is brighter than ever before, with high-visibility lines that stand out whether it's daybreak or dusk.

NailTrak removes the guesswork with three separately defined lines, creating a large area to guide your nailing and a smaller area for extreme steep-slope applications.

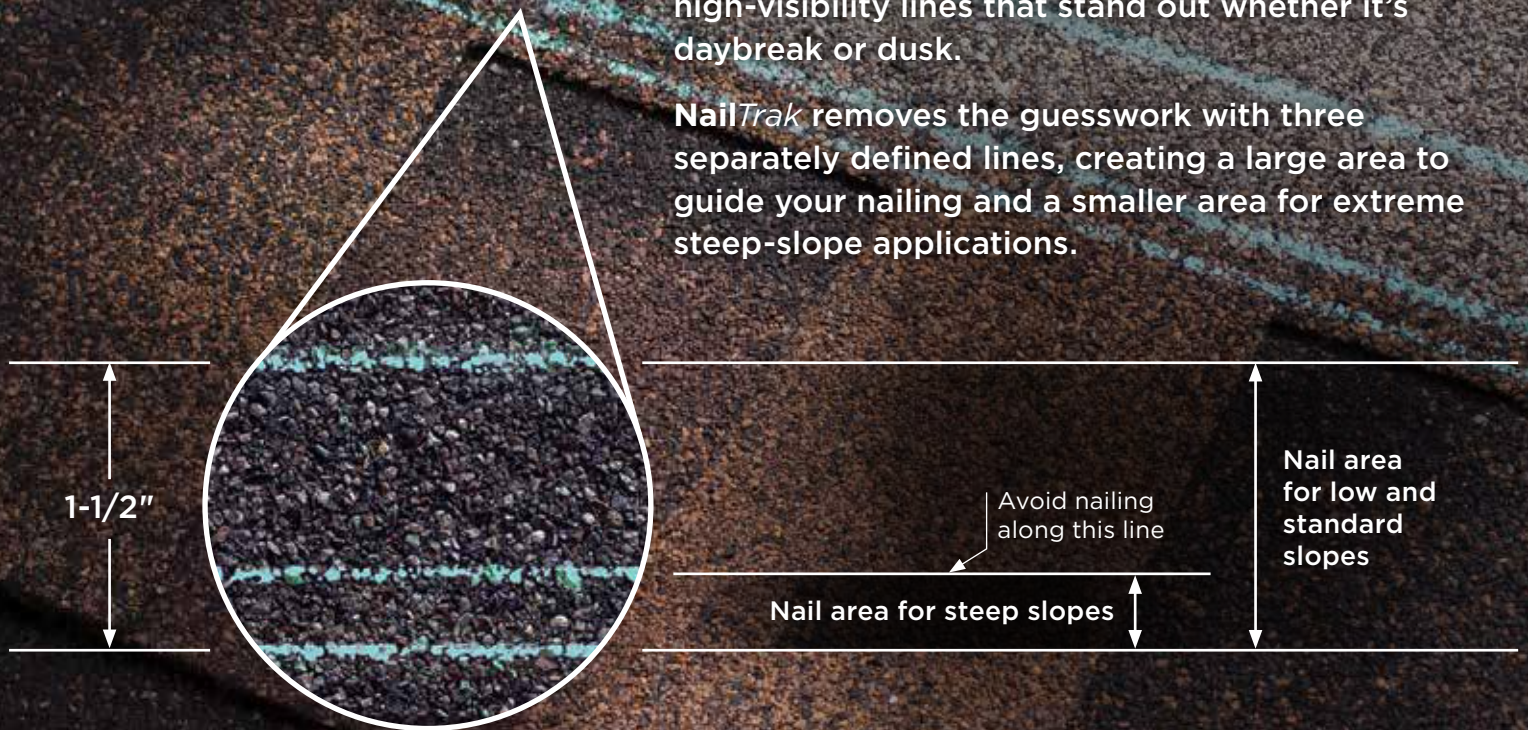

Solaris[®] CoolRoof

Solar Reflectivity

Solaris[®] Cool Roof is a sustainable shingle granule technology that applies energy-saving cool roof performance to CertainTeed's most popular shingle brands. Available in rich and authentic colors, including dark hues and tones, Solaris Cool Roof can lower roof temperatures and allow homeowners to reduce cooling costs without sacrificing beauty, quality, or color.



Luxury Shingles


Luxury shingles are the highest-quality laminated shingles available, offering a differentiated appearance or functionality that exceeds designer shingles. Apart from offering premium protection for weathering, luxury shingles provide stunning visuals, presenting the highest quality, coloration, and dimensionality. These products offer the most realistic representation of old-world wood shake and quarried slate roofing.







Presidential Shake TL, shown in Charcoal Black

COLOR AVAILABILITY

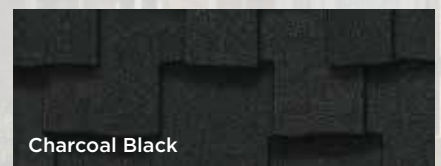

Solaris® Colors

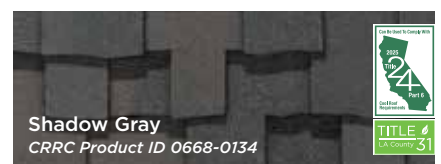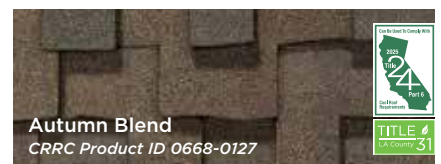

PRESIDENTIAL® SHAKE® TL

- Three-piece laminated fiberglass construction
- Distinctive sculpted, rustic look
- Lifetime limited transferable warranty - residential*
- 50-year limited transferable warranty - group-owned or commercial*
- 30-year **StreakFighter®** algae-resistance warranty (where available)
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Presidential Starter (required) and hip and ridge accessory available (see details in back of brochure)
- Colors can be used to comply with California Title 24 and Los Angeles County Title 31 Cool Roof requirements; suitability may vary by building type or climate zone.



CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class A

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Impact Resistance:

- UL 2218 Class 4



Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537





Scan code for more Presidential Shake TL information






Scan code for more Presidential Shake TL Solaris information

* See warranty for specific details and limitations.

COLOR AVAILABILITY

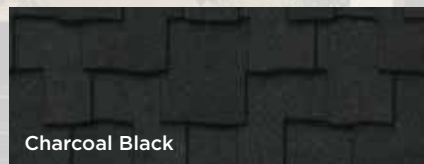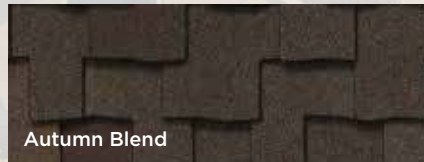

Solaris® Colors

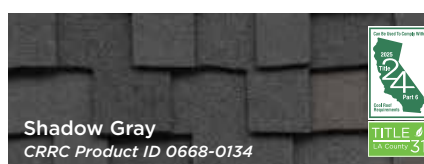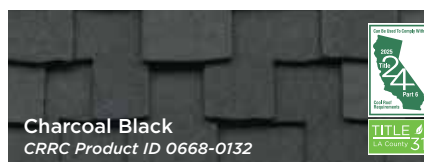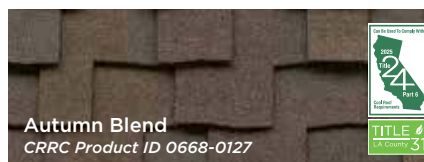

PRESIDENTIAL® SHAKE®

- Two-piece laminated fiberglass construction
- Distinctive sculpted, rustic look
- Lifetime limited transferable warranty - residential*
- 50-year limited transferable warranty - group-owned or commercial*
- 30-year **StreakFighter®** algae-resistance warranty (where available)
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Presidential Starter (required) and hip and ridge accessory available (see details in back of brochure)
- Select colors can be used to comply with the 2025 California Title 24 Part 6 Cool Roof Requirements
- Select colors can be used to comply with Los Angeles County, California Title 31 cool roof requirements for steep-sloped residential construction.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Impact Resistance:

- UL 2218 Class 3



Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537



* See warranty for specific details and limitations.



Scan code for more Presidential Shake information



Scan code for more Presidential Shake Solaris information



Landmark TL, shown in Shenandoah

LANDMARK® TL

- Three-piece laminated fiberglass construction
- Rustic appearance of hand-split wood shakes
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 30-year **StreakFighter®** algae-resistance warranty (where available)
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 160 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)
- Colors can be used to comply with California Title 24 and Los Angeles County Title 31 Cool Roof requirements; suitability may vary by building type or climate zone.



* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Impact Resistance:

- UL 2218 Class 4

Wind Driven

Rain Resistance:


- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.



Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537

COLOR AVAILABILITY



Landmark® TL Solaris® Colors




Scan code for more Landmark TL information



Scan code for more Landmark TL Solaris information

COLOR AVAILABILITY

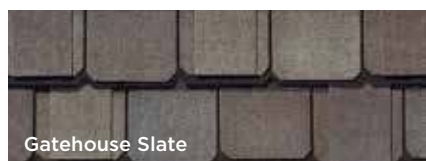

GRAND MANOR®

- Two full-size, fiberglass-based shingles with randomly applied tabs
- Authentic depth and dimension of natural slate
- Virtual five-layer coverage when applied
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 30-year **StreakFighter®** algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- High-Performance Starter and hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Impact Resistance:

- UL 2218 Class 4



Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537





Scan code for more information



Carriage House, shown in Stonegate Gray

COLOR AVAILABILITY

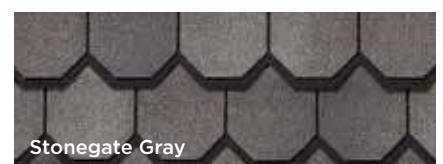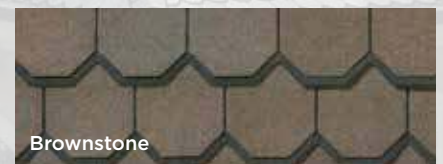

CARRIAGE HOUSE®

- Two full-size, fiberglass-based shingles
- Unique chamfered cut for scalloped appearance
- Four-layer coverage when applied
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 30-year **StreakFighter®** algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Impact Resistance:

- UL 2218 Class 4



Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537



Scan code for more information


GRAND MANOR and CARRIAGE HOUSE SHINGLES

These two shingles can be combined to create a myriad of custom patterns, emulating traditional slate roof designs.



Roof - Highland Slate, shown in Fieldstone
Siding - Cedar Impressions® Double 7" Perfection Shingles, shown in Seagrass

COLOR AVAILABILITY

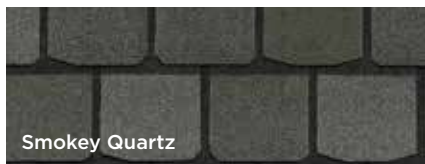

HIGHLAND SLATE®

- Single layer fiberglass-based construction
- Blended shades and dimensional appearance of natural slate
- 8" exposure, 18" x 36" size
- Lifetime limited transferable warranty - residential*
- 50-year limited transferable warranty - group-owned or commercial*
- 25-year **StreakFighter®** algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Certified to meet ASTM D3018, Type 1
- UL 790 Class A
- ASTM E 108 Class A

Wind Resistance:

- UL 2390/ASTM D 6381 Class H
- ASTM D3161 Class F

Tear Resistance:

- UL Certified to meet ASTM D3462
- CSA Standard A123.5

Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Impact Resistance:

- UL 2218 Class 3



Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537



Scan code for more information

Designer Shingles



Also known as architectural or dimensional shingles, designer shingles are the most prevalent asphalt shingles installed in North America. These products are manufactured with two or more layers of asphalt that are fused together for a thicker and richer multi-dimensional appearance, and are engineered to replicate the aesthetics of wood shake and natural slate roofing. Designer shingles are typically heavier than strip shingles and have improved warranty protection.





Landmark Premium, shown in Max Def Weathered Wood

LANDMARK® PREMIUM

- Two-piece laminated fiberglass-based construction
- Classic shades and dimensional appearance of natural wood or slate
- Lifetime limited transferable

warranty – residential*

- 50-year limited transferable warranty – group-owned or commercial*
- **NailTrak®** extra-wide nailing area for accurate installation
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 160 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Impact Resistance:


- UL 2218 Class 4



Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537

COLOR AVAILABILITY

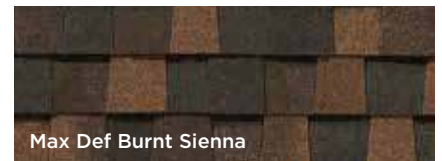

Scan code for more information



COLOR AVAILABILITY



Max Def Burnt Sienna



Max Def Moiré Black



Max Def Georgetown Gray



Max Def Weathered Wood



Max Def Heather Blend


Landmark® PRO Solaris® Colors



Max Def
Georgetown Gray
CRRC Product ID 0668-0122




Max Def
Moiré Black
CRRC Product ID 0668-0130




Max Def
Heather Blend
CRRC Product ID 0668-0123



Max Def
Resawn Shake
CRRC Product ID 0668-0124



Max Def
Burnt Sienna
CRRC Product ID 0668-0154



Max Def
Weathered Wood
CRRC Product ID 0668-0125



Silver Birch
CRRC Product ID 0668-0072



Landmark Pro, shown in Max Def Moiré Black

LANDMARK® PRO

- Two-piece laminated fiberglass-based construction
- Classic shades and dimensional appearance of natural wood or slate
- Lifetime limited transferable warranty - residential*
- 50-year limited transferable warranty - group-owned or commercial*
- **NailTrak®** extra-wide nailing area for accurate installation
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 160 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)
- Colors can be used to comply with California Title 24 and Los Angeles County Title 31 Cool Roof requirements; suitability may vary by building type or climate zone.



* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Impact Resistance:

- UL 2218 Class 3

Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537




Scan code for more Landmark PRO information



Scan code for more Landmark PRO Solaris information



COLOR AVAILABILITY

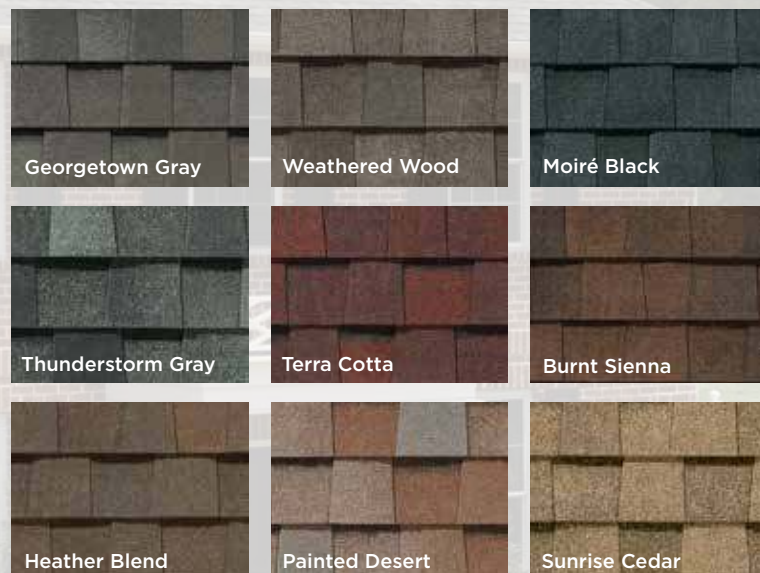

LANDMARK®

- Two-piece laminated fiberglass-based construction
- Classic shades and dimensional appearance of natural wood or slate
- Lifetime limited transferable warranty - residential*
- 40-year limited transferable warranty - group-owned or commercial*
- **NailTrak®** extra-wide nailing area for accurate installation
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 160 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)
- Colors can be used to comply with California Title 24 and Los Angeles County Title 31 Cool Roof requirements; suitability may vary by building type or climate zone.



CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Impact Resistance:

- UL 2218 Class 3


Quality Standards:

- ICC-ES-ESR-1389 & ESR-3537



Scan code for more Landmark information

Landmark® Solaris® Colors

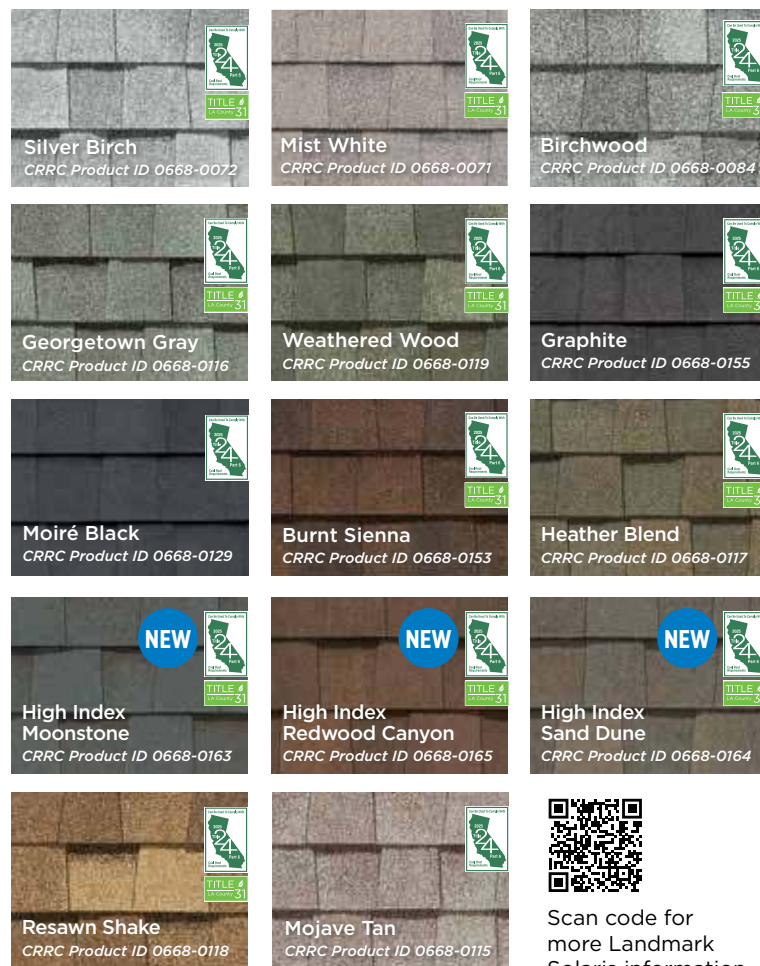

Scan code for more Landmark Solaris information



Patriot® XL, shown in Smoked Gray

COLOR AVAILABILITY



Hazelnut



Trufflewood



Smoked Gray



Jet Black

PATRIOT® XL

- Designed with oversized tabs, dramatic 3-dimensional shadow bands to create a sharp, unique look
- Classic shades and dimensional appearance of natural wood or slate
- Lifetime limited transferable warranty – residential*
- 40-year limited transferable warranty – group-owned or commercial*
- 10-year algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards

Fire Resistance:

- UL 790/ASTM E108 Class A
- Meets ASTM D3018 Type 1

Wind Resistance:

- Meets ASTM D3018 Type 1
- Meets ASTM D3161 Class F
- Meets ASTM D7158 Class H
- Meets TDI Windstorm Requirements

Tear Resistance:

- UL certified to meet ASTM D3462

Wind Driven Rain Resistance:

- TAS 100

Impact Resistance:

- UL 2218 Class 3



Scan code for
more information

Cool Roof Shingles



Landmark Solaris, shown in Heather Blend

THE COLLECTION

CertainTeed's Cool Roof Shingle Collection puts cool roof technology to work for you.

Our advanced roofing granules reflect solar energy and radiant heat far better than traditional roofing shingles, reducing your roof's temperature in the summer.

Colors can be used to comply with California Title 24 and Los Angeles County Title 31 Cool Roof requirements; suitability may vary by building type or climate zone.



Choose from three spectacular solar shingle line-ups.

GOOD: Landmark® Solaris®

BETTER: Landmark PRO® Solaris® and Presidential® Shake® Solaris®

BEST: Landmark® TL Solaris® and Presidential® Shake® TL Solaris®

***High Index** means the color has a high Solar Reflectance Index (SRI), which measures how well a roof reflects sunlight and releases heat. These colors meet CRRC Title 24 codes, support energy savings and sustainability without sacrificing aesthetic appeal.



Scan code for more Landmark information

Solar Reflectivity (SR), Thermal Emittance (TE) & Solar Reflectance Index (SRI) Data


PRODUCT - COLOR	CRRC Product ID Number	Aged Solar Reflectance	Thermal Emittance	Solar Reflective Index (SRI)	Complies with Cal Title 24 Part 6	Meets L.A. County Title 31
Landmark® Solaris® - Birchwood	0668-0084	0.21	0.92**	21 [‡]	YES	YES
Landmark® Solaris® - Burnt Sienna	0668-0153	0.20	0.92	20	YES	YES
Landmark® Solaris® - Georgetown Gray	0668-0116	0.20	0.92	20	YES	YES
Landmark® Solaris® - Graphite	0668-0155	0.21	0.91	21 [‡]	YES	YES
Landmark® Solaris® - Heather Blend	0668-0117	0.20	0.92	20	YES	YES
Landmark® Solaris® - Mist White	0668-0071	0.28	0.92**	30 [‡]	YES	YES
Landmark® Solaris® - Moiré Black	0668-0129	0.18	0.92	17	YES	NO
Landmark® Solaris® - Mojave Tan	0668-0115	0.20	0.90	19	YES	NO
Landmark® Solaris® - High Index® Moonstone	0668-0163	0.24	0.91	24	YES	YES
Landmark® Solaris® - High Index® Redwood Canyon	0668-0165	0.24	0.91	24	YES	YES
Landmark® Solaris® - Resawn Shake	0668-0118	0.20	0.93	20	YES	YES
Landmark® Solaris® - High Index® Sand Dune	0668-0164	0.24	0.91	25	YES	YES
Landmark® Solaris® - Silver Birch	0668-0072	0.27	0.89	28 [‡]	YES	YES
Landmark® Solaris® - Weathered Wood	0668-0119	0.21	0.91	21 [‡]	YES	YES
Landmark® PRO Solaris® - Max Def Burnt Sienna	0668-0154	0.20	0.92	20	YES	YES
Landmark® PRO Solaris® - Max Def Georgetown Gray	0668-0122	0.20	0.94**	21 [‡]	YES	YES
Landmark® PRO Solaris® - Max Def Heather Blend	0668-0123	0.19	0.94	20	YES	YES
Landmark® PRO Solaris® - Max Def Moiré Black	0668-0130	0.18	0.92	17	YES	NO
Landmark® PRO Solaris® - Max Def Resawn Shake	0668-0124	0.18	0.93	18	YES	NO
Landmark® PRO Solaris® - Max Def Weathered Wood	0668-0125	0.20	0.94**	21 [‡]	YES	YES
Landmark® PRO Solaris® - Silver Birch	0668-0072	0.27	0.89	28 [‡]	YES	YES
Presidential® Shake® Solaris® - Autumn Blend	0668-0127	0.20	0.93	21	YES	YES
Presidential® Shake® Solaris® - Charcoal Black	0668-0132	0.19	0.94	20	YES	YES
Presidential® Shake® Solaris® - Country Gray	0668-0128	0.21	0.92	21	YES	YES
Presidential® Shake® Solaris® - Shadow Gray	0668-0134	0.19	0.94	20 [‡]	YES	YES
Landmark® TL Solaris® - Country Gray	0668-0149	0.22	0.93	23	YES	YES
Landmark® TL Solaris® - Moiré Black	0668-0148	0.20	0.93	20	YES	YES
Landmark® TL Solaris® - Platinum	0668-0147	0.21	0.93	22	YES	YES
Presidential® Shake® TL Solaris® - Autumn Blend	0668-0127	0.20	0.93	21	YES	YES
Presidential® Shake® TL Solaris® - Charcoal Black	0668-0132	0.19	0.94	20	YES	YES
Presidential® Shake® TL Solaris® - Country Gray	0668-0128	0.21	0.92	21	YES	YES
Presidential® Shake® TL Solaris® - Shadow Gray	0668-0134	0.19	0.94	20 [‡]	YES	YES

[‡] Aged value calculated using the California Title 24 Solar Reflective Index (SRI) Calculation Worksheet

** Indicates Initial Thermal Emittance


Good

LANDMARK® SOLARIS®

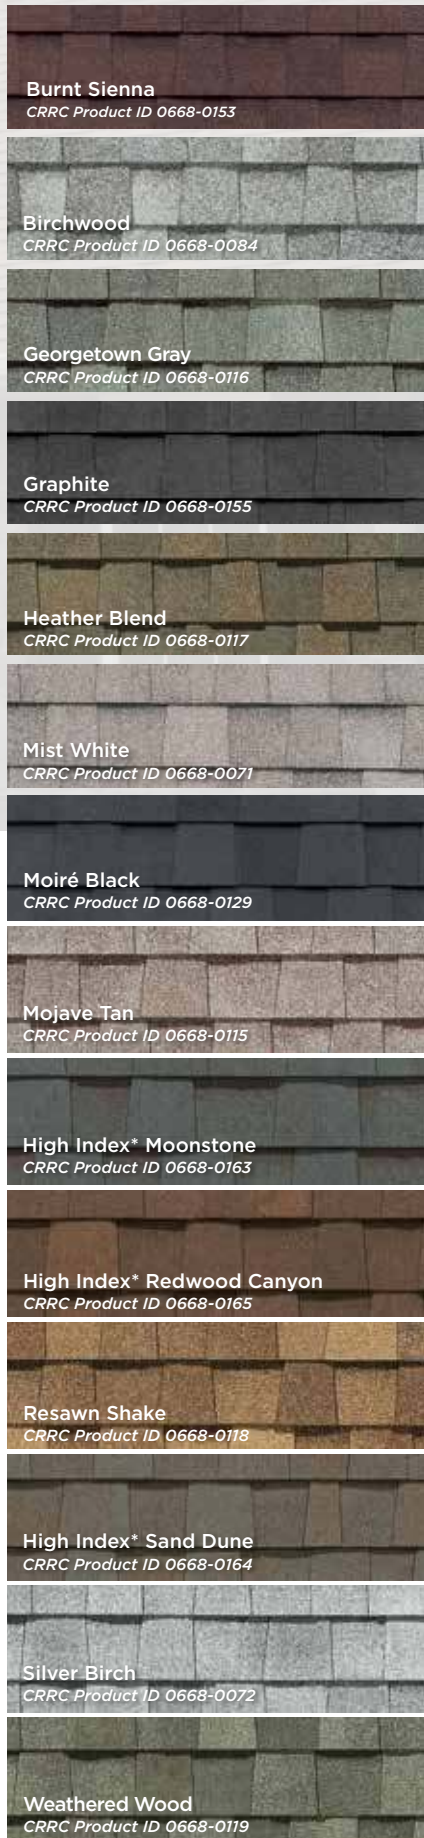

Better

LANDMARK® PRO SOLARIS®

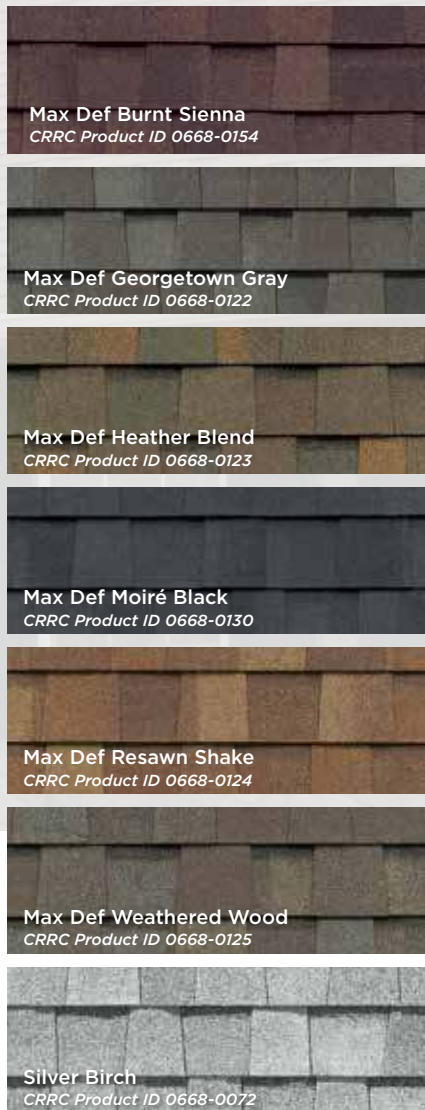


PRESIDENTIAL® SHAKE®




Best

LANDMARK® TL SOLARIS®

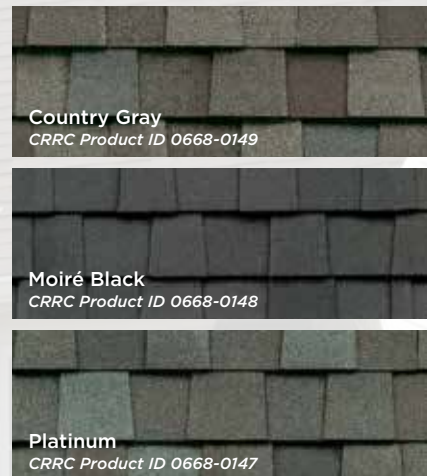

PRESIDENTIAL® SHAKE® TL

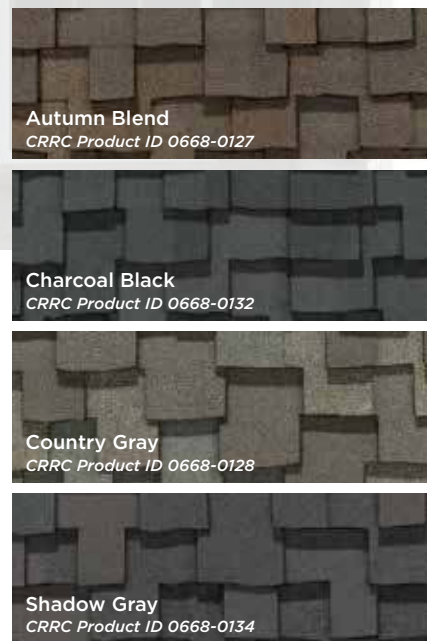

HIP AND RIDGE ACCESSORIES



Shadow Ridge

- Used for hip and ridge capping
- Single-layer coverage for product versatility
- Sealant strip for maximum adherence
- Dimensions are 13 1/4" x 39 3/8", with a 5 5/8" exposure
- Can be used on shingle-over vents or directly over centerline of hip or ridge
- Available in complementary product colors (see individual Roofing Plant Catalogs for color availability)
- UL 2218 Class 4 Impact Rated



Shangle® Ridge

- Hip and ridge capping
- Two full layers
- 12" width allows application over standard ridge vents
- Full 8" exposure
- Matches all Grand Manor, Highland Slate and Carriage House colors
- Algae resistant
- UL 2218 Class 4 Impact Rated



Cedar Crest®

- Dimensions are (overall) 12" x 36", separated into individual pieces 12" x 12", with an 8" exposure
- Covers 20 lineal feet per bundle
- Matches all Highland Slate colors
- UL 2218 Class 4 Impact Rated



Mountain Ridge®


- Fiberglass reinforced SBS modified bitumen
- Five layer design with tri-laminate base
- 10" width
- 8" exposure
- Also available in Solaris colors
- UL 2218 Class 4 Impact Rated





Color Companion Products™ for Low Slope Roof Areas

With CertainTeed Flintlastic® SA, you can coordinate flat roof areas like carports, canopies and porches with your main roof. Flintlastic SA is a self-adhering low slope roofing product available in colors that complement some of the most popular CertainTeed shingles.

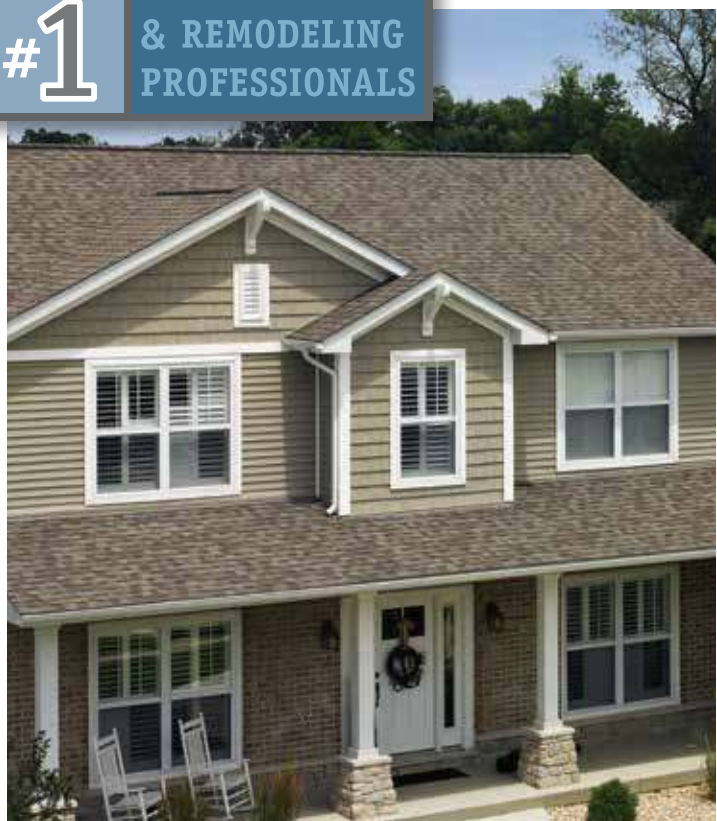


What's behind our #1 rating?

Builders and remodelers across America know certain things to be true of CertainTeed. For starters, we've been in the roofing business for over 100 years. We have thousands of satisfied homeowners. The process of building that satisfaction begins the moment you turn to us.

CertainTeed offers you the broadest range of color and style choices. But you'll see it's not style over substance. You'll get a roof that's made from the highest quality materials and backed by a strong warranty program. It's our promise to you: quality made certain, satisfaction guaranteed.

Underlayment Protection

VYCOR® ICE & WATER SHIELD® SERIES AND WINTERGUARD®

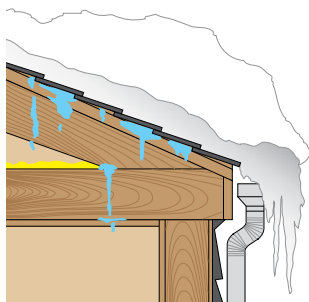

When snow and ice melt, trapped water can infiltrate to damage the roof deck and building interior.



VYCOR® Ice & Water Shield® series and WinterGuard® series are installed under shingled roofing to prevent water damage from ice dams, as well as wind-driven rain.

VYCOR® Ice & Water Shield® series and WinterGuard® series are designed for use on roof decks as a waterproofing underlayment beneath shingle, slate and tile roofs to prevent leakage due to water backup from ice dams or wind-driven rain. VYCOR® Ice & Water Shield® HT, VYCOR® Ultra™ and WinterGuard HT, an advanced waterproofing underlayment, is specially formulated to resist high roof temperatures and are CertainTeed underlayments to be warranted for use under metal roofs. VYCOR® Ice & Water Shield® series and WinterGuard® series are most commonly used in critical areas such as roof eaves, valleys and low-slope applications.

VYCOR® Ice & Water Shield® series and WinterGuard® series are classified by Underwriters Laboratories (UL) to be a suitable underlayment for use in any UL Class A, B or C fire rated shingle system, and it is manufactured to meet ASTM D1970.

VYCOR® Ice & Water Shield®

- Industry's leading waterproofing roof underlayment that protects home and contractor's reputation for over 45 years
- Forms watertight seals for high performance in severe weather protecting roofs from water intrusion due to wind-driven rain and ice dams

VYCOR® Ice & Water Shield® HT

- Specifically designed to meet the challenges inherent in metal roof assemblies with in-service temperature up to 260°F
- High thermal stability for superior performance under the most demanding conditions

VYCOR® Select™

- lightweight and easy to handle and install, while meeting or exceeding industry standards for fastener sealability
- Smooth surface provides better lap adhesion

VYCOR® Ultra™

- 100% butyl adhesive formula is designed for extreme temperature roof assemblies like desert climates and high altitude with in-service temperature up to 300°F (Ideal for copper, zinc, and COR-TEN® Roofs)
- Compatible with EPDM and TPO roofing materials to provide watertight transition between low slope & steep slope roofs

WinterGuard® Sand and Granular

Waterproofing shingle underlayment is a composite of asphalt polymers, ensuring vapor-tightness and elasticity. It seals around nails and is part of the CertainTeed Integrity Roof System®, delivering top-notch performance.

WinterGuard® PRO

High-temperature, film surfaced waterproofing underlayment.

DiamondDeck®

DiamondDeck is a synthetic, scrim-reinforced, water-resistant underlayment that can be used beneath shingle, shake, metal, or slate roofing. It is manufactured to provide best-in-class performance in terms of both weather protection and contractor safety. 10-square roll (4-foot wide and 250-foot long) is easier to handle and faster to apply than standard felt rolls.

RoofRunner®

Lightweight synthetic polymer-based underlayment outperforms felt and outclasses other synthetics. Designed for use on roof decks as a water-resistant layer beneath asphalt roofing shingles, this scrim-reinforced underlayment includes a special top surface treatment that provides excellent slip resistance, even when wet. Large roll size - 4 ft wide x 250 ft long - speeds application.

RoofRunner® AIR

RoofRunner® AIR is a breathable synthetic roof underlayment with a multilayer coated structure that promotes rapid roof deck drying. Designed for use on roof decks as a water-resistant layer beneath asphalt roofing shingles, the unique permeable layers allow moisture to escape and help to prevent mold, rot, and structural damage.

The robust technology found in each layer of RoofRunner AIR contributes to its optimal rating of 15 perms or greater. It's important to maintain a dry and healthy roof deck with a full assembly that includes proper ventilation and attic space that contribute to a breathable roof structure.

For specific details and limitations, refer to the actual product warranties.



SureStart™ Protection

Because CertainTeed roofing products are manufactured to the highest quality standards, we confidently include the additional assurance of SureStart™ protection with all CertainTeed shingles. SureStart provides the strongest protection you can get in the vital early years after your new roof has been installed.

Simply put, if a manufacturing defect is discovered during the SureStart period, CertainTeed will provide reimbursement of 100% of the cost of the shingles and labor to repair the defective shingles or apply new shingles to replace the defective shingles.

See actual warranty for details and limitations.

Warranty Type	Standard*	★★★ 3-STAR	★★★★ 4-STAR	★★★★★ 5-STAR
Coverage	Manufacturing Defects	Manufacturing Defects	Manufacturing Defects	Manufacturing Defects
SureStart - Single Family (Non-prorated)	10 years	50 years**	50 years***	50 years***
Materials & Labor	✓	✓	✓	✓
Tear-Off		✓	✓	✓
Disposal		✓	✓	✓
Workmanship			15 years	30 years

*See CertainTeed's Asphalt Shingle Residential Products Limited Warranty for complete details, conditions, limitations and exclusions. For a copy, go to www.certainteed.com or call 800-782-8777.

NOTE: XT™25 shingles carry 10 years with 3-STAR, 20 years with 4-STAR Coverage and 25 years with 5-STAR Coverage.

Fully transferable for 15 years with 3-STAR Coverage, 20 years with 4-STAR Coverage, and 20 years with 5-STAR Coverage.

**Applies to single-family detached houses. Duration for all other types of structures is limited to 25 years.

***Applies to single-family detached houses. Duration for all other types of structures is limited to 30 years.











Low-Slope Roof Sections: If a project being roofed with CertainTeed shingles has a low-slope section that will be roofed with our Flintlastic® SA , or our SMARTCOAT™ systems, SureStart PLUS extends FULL coverage for the duration of the low-slope warranted period, depending on the level of protection you choose. Residential shingles must be a minimum of one and a half times (1.5X) the amount of flat roof submitted (low-slope square maximum may apply). See Low-Slope Residential Limited Warranty for system requirements and warranty durations.



SureStart™ PLUS protection is available through credentialed contractors only



SELECTION GUIDE

LUXURY SHINGLES			Shingle Construction and Description	Available in Solaris CoolRoof <i>CoolRoof technology provides solar reflectivity</i>	UL Class A Fire Resistance Rating	UL Certified to Meet ASTM D3462	UL Certified to Meet ASTM D3018 Type 1	UL 2218 Impact Resistance Rating	ASTM D3161 Wind Resistance	Conforms To CSA Standard A123.5
Presidential Shake TL		Three-piece laminated fiberglass construction; Distinctive sculpted, rustic look		✓	✓	✓	✓	Class 4	Class A	✓
Presidential Shake		Two-piece laminated fiberglass construction; Distinctive sculpted, rustic look		✓	✓	✓	✓	Class 3	Class F, 110 mph	✓
Landmark TL		Three-piece laminated fiberglass construction; Rustic appearance of hand-split wood shakes		✓	✓	✓	✓	Class 4	Class F, 110 mph	✓
Grand Manor		Two full-size, fiberglass-based shingles with randomly applied tabs; Authentic depth and dimension of natural slate; Virtual five-layer coverage when applied			✓	✓	✓	Class 4	Class F, 110 mph	✓
Carriage House		Two full-size, fiberglass-based shingles; Unique chamfered cut for scalloped appearance; Four-layer coverage when applied			✓	✓	✓	Class 4	Class F, 110 mph	✓
Highland Slate		Single layer fiberglass-based construction; Blended shades and dimensional appearance of natural slate			✓	✓	✓	Class 3	Class F, 110 mph	✓
DESIGNER SHINGLES										
Landmark Premium		Two-piece laminated fiberglass-based construction; Classic shades and dimensional appearance of natural wood or slate			✓	✓	✓	Class 4	Class F, 110 mph	✓
Landmark PRO		Two-piece laminated fiberglass-based construction; Classic shades and dimensional appearance of natural wood or slate		✓	✓	✓	✓	Class 3	Class F, 110 mph	✓
Landmark		Two-piece laminated fiberglass-based construction; Classic shades and dimensional appearance of natural wood or slate		✓	✓	✓	✓	Class 3	Class F, 110 mph	✓
Patriot XL		Designed with oversized tabs. Dramatic 3-dimensional shadow bands to create a sharp, unique look.			✓	✓	✓	Class 3	Class F, 110 mph	✓

** Wind warranty upgrade to 130 mph available.

*** Wind warranty upgrade to 160 mph available.

ICC-ES ESR-1389 & ESR-3537	Limited Transferable Warranty Against Manufacturing Defects On Residential Applications <small>*50-Year on Group-owned or Commercial Applications</small>	StreakFighter algae-resistance Warranty <small>(where available)</small>	SureStart Protection	Wind-Resistance Warranty <small>Upgraded wind warranty available. See warranty for details and limitations</small>	Shingle Size	Bundles Per Square
✓	Lifetime*	30-year (where available)	10-year	15-year 110 mph **	14 1/4" x 40" 4" Exposure	6
✓	Lifetime*	30-year (where available)	10-year	15-year 110 mph **	14 1/4" x 40" 4" Exposure	5
✓	Lifetime*	30-year (where available)	10-year	15-year 110 mph ***	13 1/4" x 40" 5 5/8" Exposure	4
✓	Lifetime*	30-year	10-year	15-year 110 mph **	18" x 36" 8" Exposure	5
✓	Lifetime*	30-year	10-year	15-year 110 mph **	18" x 36" 8" Exposure	5
✓	Lifetime*	25-year	10-year	15-year 110 mph **	18" x 36" 8" Exposure	3
✓	Lifetime*		10-year	15-year 110 mph ***	13 1/4" x 38 3/4" 5 5/8" Exposure	4
✓	Lifetime*		10-year	15-year 110 mph ***	13 1/4" x 38 3/4" 5 5/8" Exposure	3
✓	Lifetime*		10-year	15-year 110 mph ***	13 1/4" x 38 3/4" 5 5/8" Exposure	3
✓	Lifetime*	10-year	10-year	15-year 110 mph **	42" x 14"; 6" exposure	3

CertainTeed starter and CertainTeed hip and ridge required

High-Performance Starter

Starter Course shingle specifically for use with Grand Manor and Highland Slate—and the only approved installation alternative to using the shingles themselves.

- 10" x 36", 102 lineal ft. per bundle, 34 shingles per bundle
- Provides labor and cost savings by not cutting shingles
- Dual sealant strip for increased wind resistance
- Better look with straight factory-cut eave edge

Presidential Starter

Required for Presidential Shake TL and Presidential Shake applications.

- 13 1/4" x 40" (required double layer), 36.5 lineal ft. per bundle (based on 2-layer application), 22 shingles per bundle.
- Two layers of straight factory-cut eave edge
- Available in the entire Presidential Shake TL and Presidential Shake color line
- Assures Class A fire rating
- Saves significant installation time

Swiftstart® and Swiftstart® SA

Swiftstart metric starter shingle is designed specifically for use with CertainTeed Landmark Series shingles. Rather than cutting expensive field shingles to use as starters, you can save time and money by starting with Swiftstart.

- Code-compliant, meets min. 2" headlap requirement for metric shingles; many competing products do not
- Recommended for use to obtain enhanced warranties
- Swiftstart® SA features a sealing strip to prevent wind uplift at the roof edge, ensuring enhanced durability and waterproofing.

Shangle® Ridge

- Hip and ridge for Grand Manor, Carriage House and Highland Slate; 10 lineal ft. per bundle; 15 shingles per bundle
- UL 2218 Class 4 Impact Rated

Shadow Ridge and Shadow Ridge XL

- Hip and ridge for Landmark TL and Landmark Series; 45 lineal ft. per bundle; 24 shingles per bundle
- Hip and ridge for Patriot XL. 29.6 lineal ft. per bundle; 63 (21 3-pc units) shingles per bundle.
- UL 2218 Class 4 Impact Rated

Cedar Crest®

- Hip and ridge for Highland Slate; 20 lineal ft. per bundle
- UL 2218 Class 4 Impact Rated

Mountain Ridge®

- Hip and ridge for Presidential TL, Presidential Shake, Landmark TL, and Landmark Series.
- UL 2218 Class 4 Impact Rated

Ventilation

- CertainTeed Ridge Vent 9" filtered Class A
- CertainTeed Ridge Vent 9" filtered
- CertainTeed Ridge Vent 12" filtered
- CertainTeed Intake Vent filtered
- CertainTeed Rolled Ridge Vent filtered





With **a portfolio of commercial and residential roofing products** and quality standards that lead the industry, you can rest easily knowing CertainTeed has you covered.



Residential



Residential Accessories



Solar



Commercial



Commercial Accessories




Liquid-Applied Roofing

learn more at:

certainteed.com/roofing

Products
available in
areas shown



CertainTeed

Ceilings • Gypsum • Insulation • Roofing • Siding • Trim
20 Moores Road, Malvern, PA 19355 | 800-233-8990 | certainteed.com

©01/26 CertainTeed, Printed in the USA, Code No. 00-00-258-US-EN



A PROGRAM OF IBHS

These products are part of CertainTeed's
FORTIFIED™-Compliant Roof System
for enhanced protection.